

PALLADIUM

click

plank cl 30: 1210 x 176.6 mm - box: 12 planks (=2,564 m²) - Pallet: 65 boxes (=166,68 m²)

plank cl 40: 1210 x 176.6 mm - box: 8 planks (=1,709 m²) - Pallet: 80 boxes (=136,76 m²)

product specifications



		click 30 plank	click 40 plank
Total thickness	EN ISO 24346	3.4 mm	4 mm + 1 mm
Pad (IXPE)			yes
Thickness of the wear layer	EN ISO 24340	0,3 mm	0,4 mm
Total Weight	EN ISO 23997	6.6 kg/m ²	7.9 kg/m ²
Usage classification	EN ISO 10874	23/31	23/32/41

test results



Underfloor heating	EN ISO 12524	suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²	
Castor chair	EN ISO 4918	pass	pass
Fire resistance	EN ISO 13501-1	Bfl-s1	Bfl-s1
Light fastness	EN ISO 105-B02	> 6	> 7
Thermal resistance	EN 8302	0,011 m ² K/W	0,035 m ² K/W
Chemical resistance	EN ISO 26987	OK	OK
Residual indentation	EN ISO 24343-1	< 0,1 mm	< 0,1 mm
Slip resistance	DIN 51130	R10	R10
	EN ISO 13893	class DS	class DS
Sound reduction: impact sound	EN ISO 717-2	3 dB	20 dB
Reflected walking sound	EPLF draft 021029-3-2004	39 SONE (49% sound reduction)	33 SONE (57% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %	< 0,15 %
Residential warranty		15 y	20 y
Commercial warranty		0 y	5 y
Formaldehyde	EN ISO 717-1	E1	E1
Lock Strength	EN ISO 10582	> 3 kN/m	> 4 kN/m



click 30



click 40




Pad

click 40 plank

Material		IXPE
Thickness		1 mm
Compressive strength	EN 826	117 kPa
Punctual conformability	CEN TS 16354: 12-2013	0.52 mm
Water absorption	EN 12087	0.6%


click 30 plank

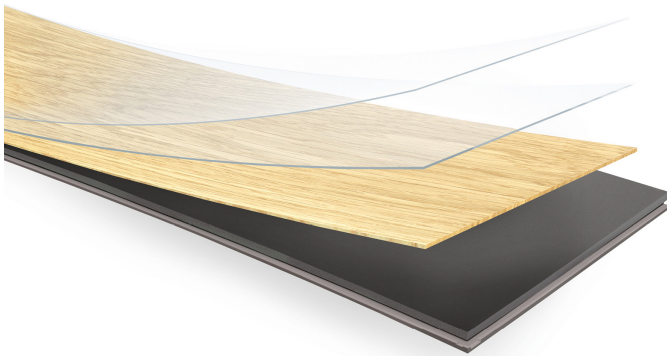

- 1 Protective PU lacquer
- 2 Wear layer 0.3 mm
- 3 Decorative printfilm
- 4 Rigid board

Total thickness: 3.4 mm

click 40 plank


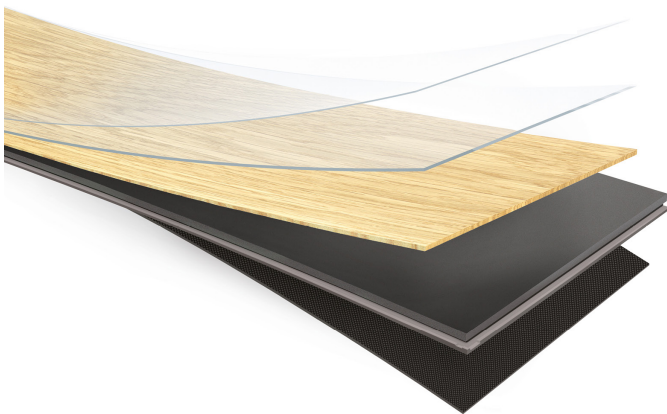


- 1 Protective PU lacquer
- 2 Wear layer 0,4 mm
- 3 Decorative printfilm
- 4 Rigid board
- 5 Integrated underfloor (1 mm)

Total thickness: 4+1 mm (planks)



click 30



click 40

